


Hybrid Typhoon Mobile



Complete mobile hygiene station for cleaning of open plant surfaces

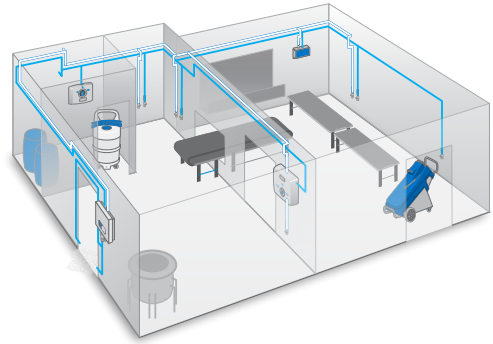

Nilfisk FOOD Hybrid Typhoon is equipped with the new DuoBlock which allows 2 detergents, 1 of which could be mixed. The mobile design allows reaching and cleaning every corner of your food premises despite the hose length.

The Hybrid Typhoon has an integrated water pump supplying a water pressure of 20 bars + inlet pressure, max 25 bar. It has a built-in security kit with dry-run protection and automatic turn-off after 30 min. inactivity.

Applications

- Open plant surfaces

Features

- Corona technology
Better mix of air, detergent and water - generates approx. 20% more foam.
- DuoFoam Technology
The new injector block has the capacity for two different compounds at only one outlet, which makes it very easy and safe to change from one product to another.
- MIX, Double Injection Technology
The unique system is prepared for the injection of an extra booster product into the DuoFoamTechnology block, which takes the cleaning effect into a whole new level.

Benefits

- Flexible
- Safe
- Hygienic
- Saved time
- Saved labour costs
- Saved water costs

Hybrid Typhoon

Complete mobile hygiene station for cleaning of open plant surfaces



Technical specifications

Water	Hybrid Typhoon	Hybrid Typhoon 40
Connection type inlet	3/4" quick coupler	3/4" quick coupler
Pump pressure	20 bar	40 bar
Adjustable operational pressure	20 bar + inlet (max 25 bar)	35 bar + inlet (max 40 bar)
Operational flow range	10-50 l/min	10-60 l/min
Min. inlet pressure	2 bar@50 l/min	2 bar@60 l/min
Max. inlet pressure	4 bar	4 bar
Max. water temperature	70°C	70°C
Electricity		
Power consumption	7,7 kW	11,5 kW
Nom. current	3/PE 400Vac +-10% 50/60Hz	3/PE 400Vac +-10% 50/60Hz
Security of electrical wiring	16 A	16 A
Electrical cable; L1, L2, L3, PE	CEE 5 px16A 400V	CEE 5 px16A 400V
General		
Number of products	2	2
IP class	IP55	IP55
Max. hose length (recommended)	25 m	25 m
Sound level ISO 11202	Below 70dB	Below 70dB
Weight	130 kg	120
Dimensions HxWxD	690x1445x1030 mm	690x1445x1030 mm

Standard models

Model	Article no.
Hybrid Typhoon 50Hz	110004510
Hybrid Typhoon 50Hz, userpack	110004511
Hybrid Typhoon 50Hz, 40 bar	110004512
Hybrid Typhoon 50Hz, 40 bar userpack	110004513
Hybrid Typhoon 60Hz	110004516
Hybrid Typhoon 60Hz, userpack	110004517

Need more info?

Visit NILFISKFOOD.COM for more details including video tutorials and more.



Web



Video



Troubleshooting

Blytaekervej 2
9000 Aalborg
Denmark

Nilfisk FOOD
NILFISKFOOD.COM

For further information:
Phone: +45 29 69 51 00
E-mail: info@nilfiskfood.com