


Satellite Prediluted

Hygiene station for rinsing, foaming
and disinfection with three separate outlets

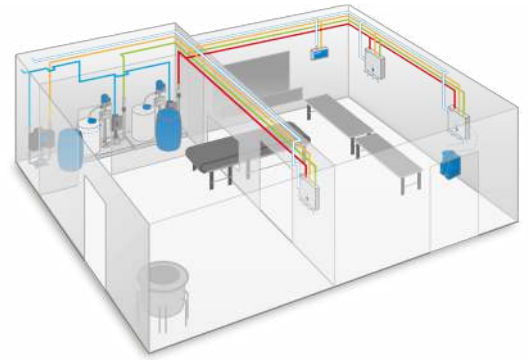

Nilfisk FOOD Hybrid Pre-diluted satellite is built to set high standards and meet the customers expectation. The PD satellite is to be used with the Mixing Stations and with Boosters. It comes with one or two separate lines for one or two detergents and one rinse line.

This PD satellite is highly recommended for the Food & Beverage production plants with high safety standards, who does not allow keeping concentrated detergent in the food processing areas.

Applications

- Food & Beverage production plants
- External surfaces

Features

- Pre-diluted - detergents are pumped from a remote location to the foam equipment. Ensuring no concentrated products in the production area and ensuring a uniform concentration all over.
- MIX, Double Injection Technology. The unique system is prepared for the injection of an extra booster product into the DuoFoamTechnology block, which takes the cleaning effect into a whole new level.
- The CoronaTechnology air system – patent pending – is a completely new construction that sets standards within the cleaning industry. Thanks to this system the air is injected into the water stream over a larger surface and at a higher speed. The result is a better mix of air, detergent and water that generates approx. 20% more foam.
- DuoFoam Technology - The new injector block has the capacity for two detergents at only one outlet, which makes it very easy and safe to change from one product to another. Patent pending.

Benefits

- Flexible and cost efficient
- One or two separate lines for one or two products or one rinse line
- High safety standard

Satellite Prediluted

Hygiene station for rinsing, foaming & disinfection with 3 outlets



Standard models

| Model | Article no. |
|---------|-------------|
| SUPD1 | 110003439 |
| SUPD2 | 110003440 |
| SU21PD1 | 110003441 |
| SU21PD2 | 110003442 |

Technical specifications

Water

| | |
|----------------------------------|------------|
| Pipe dimension inlet Ø | 1/2" |
| Pipe dimension outlet Ø | 1/2" |
| Max. operational pressure | 12-40 bar |
| Water flow | 8-30 l/min |
| Min. pressure of water supply | 12 bar |
| Max. pressure of water supply | 40 bar |
| Max. temperature of water supply | 70°C |

Compressed air supply

| | |
|-----------------------------|-------------|
| Min. pressure of air supply | 6 bar |
| Max. pressure of air supply | 10 bar |
| Number of products | 2 |
| Weight | 10 kg |
| Dimensions in mm | 530x400x140 |

Need more info?

Visit NILFISKFOOD.COM for more details including video tutorials and more.



Web



Video



Troubleshooting

Blytaekkervej 2
9000 Aalborg
Denmark

Nilfisk FOOD
NILFISKFOOD.COM

For further information:
Phone: +45 29 69 51 00
E-mail: info@nilfiskfood.com