



MOBYFOAM FI-10N

Mobile foam unit for
small production areas

- ▲ Ergonomically designed trolley
- ▲ Easily manoeuvrable
- ▲ Integrated hose rack
- ▲ Pneumatic operation
- ▲ Easy operation and maintenance




SURFACE HYGIENE

The new **MobyFoam FI-10N** mobile foam unit, with a tank capacity of 37 litres, offers an innovative and ergonomic solution for the cleaning of small areas in the food processing industry.

The easy to manoeuvre trolley is equipped with an air operated diaphragm pump to generate the foam.

This means that the tank containing the cleaning solution is not pressurized which enables additional filling during operation. The unit is practically maintenance free and operation is easy by means of a single adjustment control for compressed air.

Features

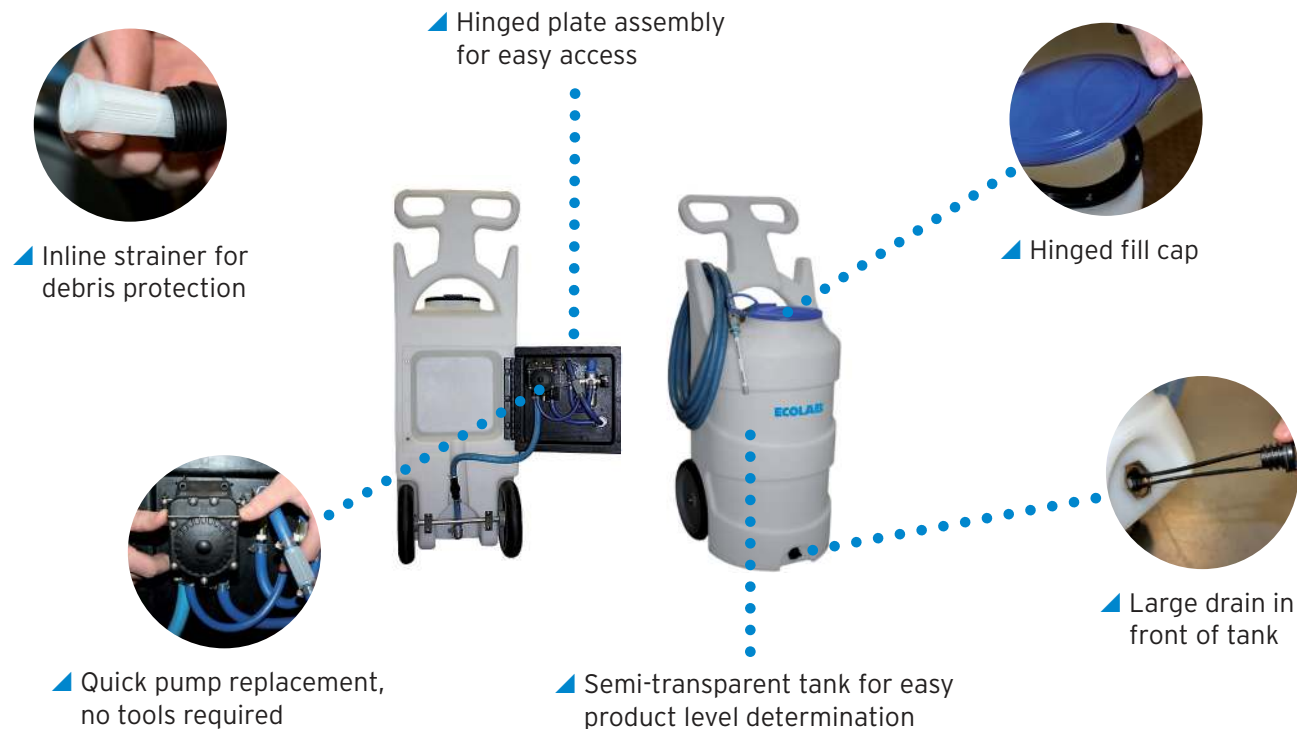

Technical Data

EBS no. MobyFoam FI-10N: 10014620

Air pressure (pump): max. 5,5 bar

Air consumption: 140 - 280 NI/min

Foam output: 57 - 114 l/min

Capacity tank: 10 gallons, 37 litres

Water temperature: max. 40 °C

Material trolley: polyethylene

Material pump: Santoprene®

Hose length/diameter: 6 m/13 mm ID

Approvals: CE

Dimensions (W x D x H): 40 x 48 x 104 cm

Weight 18 kg

EMEA Headquarters

Ecolab Europe GmbH
Richtstrasse 7
8304 Wallisellen
Switzerland
Tel. +41 44 877 2000

www.ecolab.com

© 2012 Ecolab. All rights reserved. MOBYFOAM FI-10N-EN/21MAR12/DD

ECOLAB®