

## SERVICE INFORMATION


### Quick coupling maintenance, non return valve with blow through and Doorway Foamer kit

#### **Quick couplings maintenance**

It is recommended to lubricate all coupling parts regularly (approx. once a week) with waterproof grease to prevent leaks and damage of O-rings. If the unit is equipped with a spray gun the piston of the gun should also be lubricated. In leaking quick couplings the O-rings should be replaced.

According to usage, however at least once a year, an expert should make service on the unit in order to prevent defects and failures when using the system.

Experts are persons who due to their skilled experience have sufficient knowledge of low-pressure cleaning equipment and the like and are confident with the state work security regulations, accident preventing regulations, lines and generally acknowledged technical regulations such as DIN-norms and VDE-provisions.

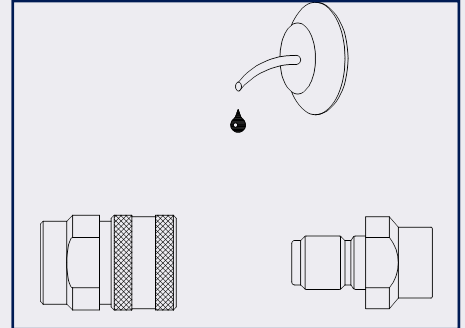

#### **Foamatic - Extra safety – Non-return valve with blow-through**

As an extra safety precaution we have implemented an extra non-return valve with blow through, so in case the system fails the water will not go back into the air supply but it will be blown out through the non-return valve.

The valve is as standard installed in all Foamatics/Foamatic Maninstations.



#### **DoorwayFoamer Kit**

On request from our customers we have now added 1x coupling part male 1/2" and 2x hose clamps for the "nozzle kit 1 Doorway sanitary system" Art. no. 0607944 and 1x coupling part male 1/2" and 4x hose clamps for the "nozzle kit 2 Doorway sanitary system" Art. no. 0607945.

Should you need any further information do not hesitate to contact our company.

For further  
information

please contact :

Nilfisk FOODs sales department  
on: dir. tel: +45 2969 5100 or  
send a request to our info mail:  
info@nilfiskfood.com